



VISCOSITY


Product Data Sheet

Revised: 2020/12/21 (Version 2)

VISCOSITY TUTELA DIESEL FUEL WINTER TREATMENT

Engineered with Fluid Technology Solutions™, our expertly designed formulation provides high performance and an extended protection for your off-road equipment.

Your number one priority is making sure your equipment is always on the move. It's the engine of your business! When your equipment operates in the most extreme conditions- it requires the best protection available at key contact points in the driveline even in cold temperature.

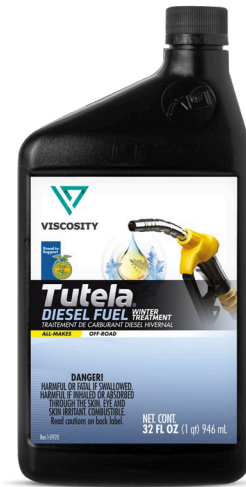

Description and Applications

VISCOSITY TUTELA Diesel Fuel Winter Treatment prevents cold start-up issues in your engine to keep your farm in fluid motion.



Cold Weather



Rust &
Corrosion
Protection

VISCOSITY TUTELA Diesel Fuel Winter Treatment improves fuel flow at low temperatures reducing the cold filter plugging point (CFPP) by up to 35°F. It helps and ensures diesel fluidity, while prevention corrosion, reducing water content, and preventing filter plugging due to fuel gel and wax formation. The product is fully compatible with biodiesel blends from B2 to B20.

METHOD of USE: Application to bulk fuel storage tank.

DOSAGE: 32 oz (1 quart) treats up to 250 gallons of fuel.

STORAGE: Unopened and stored at room temperature away from direct sunlight, for at least 3 years.

Benefits

- Prevents gelling and fuel waxing
- Removes water and helps prevent corrosion in the fuel system
- Stabilizes fuel with supplemental antioxidants

Typical Physical Data

Parameters	Method	Typical Value
Appearance		Slight Hazy Yellow
Specific Gravity	ASTM D4052	0.86
Gardner Color	ASTM D1544	1
Refractive Index	ASTM D1218	1.47

All technical data is provided for reference only. These characteristics are typical of current production. Whilst future production will conform to VISCOSITY's specification, variations in these characteristics may occur.



VISCOSITY

Health, Safety and Environment

This product is unlikely to present any significant health and safety hazards when used in the recommended application. Avoid contact with skin. Wash immediately with soap and water after skin contact. Do not discharge into drains, soil or water. For further detail regarding storage, safe handling, and disposal of product, please refer to product SDS or contact us at: www.viscosityoil.com

Important Note

VISCOSITY Documents and the information contained herein is believed to be accurate as of the date of printing. VISCOSITY Documents information provided is based on standard tests under laboratory conditions and is given only as a guide. Users are advised to ensure that they refer to the latest version of these VISCOSITY Documents. It is the responsibility of the users to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations imposed by the respective local authorities.

Safety Data Sheets are available for all our products and should only be consulted for appropriate information regarding storage, safe handling and disposal of the product. No responsibility shall be taken by either VISCOSITY or its subsidiaries and related holding corporation for any loss or injury or any direct, indirect, special, exemplary, consequential damages or any damages whatsoever, whether in action of contract, negligence or other tortious action, in connection or resulting from abnormal use of the materials and/or information, from any failure to adhere to recommendations, or from hazards inherent in the nature of the materials and/or information. All products, services and information supplied are under our standard conditions of sale. Please consult with any of our local representative in the event you require any further information.